

Optolinx FCU-RACK16




16 Slot Universal Media Converter Center

Features



- ▶ Supports 16 FCU Series Media Converters
- ▶ 19" Rackmount Design, 2U Height
- ▶ Supports 2 Slide-In Hot-Swappable AC Power Modules
- ▶ Redundant and Load Sharing Power Supply System
- ▶ LED Indicators for Primary & Backup Power Supplies
- ▶ 3 Hot-Swappable Cooling Fans
- ▶ Air-Dynamic Cooling System
- ▶ Plug-and-Play Operation
- ▶ 5-Year Warranty



▶ Dimensions (unit = mm)

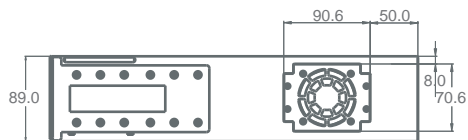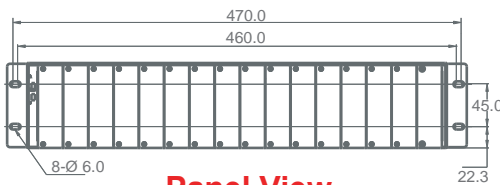

Rear View

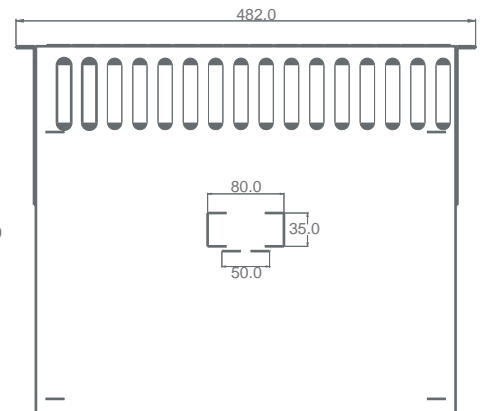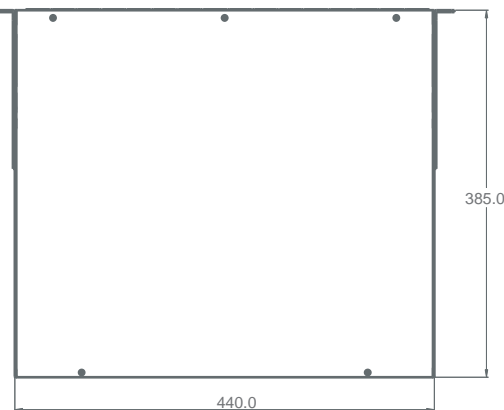

► Specifications

Number of Module Slots

16 Slots

Number of Power Slots

2 Slide-In Hot-Swappable Power Slots

LED

Power A Activity
Power B Activity

Redundancy

2 Hot-Swappable Redundant Powers

Power

Slide-In Power Modules:
- Input AC 110V - 240V
- Output DC 5V

Power Consumption

Empty (Without Modules): 9.5W

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Case Dimension (W x H x D)

FCU-RACK16: 440 x 385 x 89 mm (17.32 x 15.16 x 3.50 inches)
Power Module: 152 x 62 x 267 mm (6 x 2.44 x 10.5 inches)

Shipping Weight

FCU-RACK16: 10.8 Kg (23.76 lbs.)
Power Module: 1.5 Kg (3.3 lbs.)

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

FCU-RACK16-AC
FCU-RACK16-DC
FCU-RACK-AC-PWR
FCU-RACK-DC-PWR

16 Slot Universal Media Converter Center (with 1 AC Power Module)
16 Slot Universal Media Converter Center (with 1 DC Power Module)
Additional Redundant AC Power Module for FCU-RACK16
Additional Redundant DC Power Module for FCU-RACK16

Optional Accessories

CBF-SC01ST-MD
CBF-SC01SC-MD
CBF-SC01SC-SS
AD-SCM-STF-M
AD-SCM-STF-S

SC to ST Multi-Mode Duplex Fiber Cable (1 Meter)
SC to SC Multi-Mode Duplex Fiber Cable (1 Meter)
SC to SC Single-Mode Simplex Fiber Cable (1 Meter)
SC (Male) to ST (Female) Duplex Adapter (Multi-Mode)
SC (Male) to ST (Female) Duplex Adapter (Single-Mode)

Aaxeon Technologies, Inc.

445 Capricorn St.
Brea, CA 92821
USA

Toll-Free: (877) AAXEON5 (229-3665)
Phone: (714) 671-9000
FAX: (714) 671-9944
e-Mail: info@aaxeon.com

aaxeon[®]
www.aaxeon.com